



A Higher-order Block Method for Numerical Approximation of Third-order Boundary Value Problems in ODEs

Adefunke Bosede Familua^a, Ezekiel Olaoluwa Omole^{b,c,*}, Luke Azeta Ukpebor^d

^aDepartment of Mathematics and Statistics, First Technical University, Ibadan, Oyo State, Nigeria

^bDepartment of Mathematics and Statistics, Joseph Ayo Babalola University, Ikeji Arakeji, Osun State, Nigeria

^cDepartment of Mathematics, Federal University Oye-Ekiti, Ekiti State, Nigeria

^dDepartment of Mathematics, Ambrose Alli University Edo State, Nigeria

Abstract

In recent times, numerical approximation of 3rd-order boundary value problems (BVPs) has attracted great attention due to its wide applications in solving problems arising from sciences and engineering. Hence, A higher-order block method is constructed for the direct solution of 3rd-order linear and non-linear BVPs. The approach of interpolation and collocation is adopted in the derivation. Power series approximate solution is interpolated at the points required to suitably handle both linear and non-linear third-order BVPs while the collocation was done at all the multi-derivative points. The three sets of discrete schemes together with their first, and second derivatives formed the required higher-order block method (HBM) which is applied to standard third-order BVPs. The HBM is self-starting since it doesn't need any separate predictor or starting values. The investigation of the convergence analysis of the HBM is completely examined and discussed. The improving tactics are fully considered and discussed which resulted in better performance of the HBM. Three numerical examples were presented to show the performance and the strength of the HBM over other numerical methods. The comparison of the HBM errors and other existing work in the literature was also shown in curves.

DOI:10.46481/jnsps.2022.706

Keywords: Convergence analysis, Linear & nonlinear problems, Ordinary differential equations, Power series basic function, Third-order boundary value problems

Article History :

Received: 13 March 2022

Received in revised form: 28 May 2022

Accepted for publication: 30 May 2022

Published: 25 August 2022

© 2022 The Author(s). Published by the Nigerian Society of Physical Sciences under the terms of the Creative Commons Attribution 4.0 International license (<https://creativecommons.org/licenses/by/4.0>). Further distribution of this work must maintain attribution to the author(s) and the published article's title, journal citation, and DOI.

Communicated by: J. Ndam

1. Introduction

Numerous common happenings in connection with physical sciences, and engineering are modeled in form of linear and nonlinear BVPs. Although, some modeled problems do not have theoretical solution or closed form. Consequently, numer-

ical method is employed to solve such class of modeled problems. In this article, the numerical solution of third-order BVPs of the type

$$y'''(x) = v(x, y, y', y''), \quad (1)$$

with the initial conditions, boundary conditions or any other form as follow,

$$y(a) = \alpha_a, \quad y'(a) = \beta_a, \quad y'(x_b) = \nu_b, \quad (2)$$

$$y(x_a) = \alpha_0, \quad y'(a) = \beta_a, \quad y(b) = \nu_b, \quad (3)$$

*Corresponding author tel. no: +2348065086963

Email address: eoomole@jabu.edu.ng, omolez247@gmail.com
(Ezekiel Olaoluwa Omole)

$$y(x_a) = \alpha_a, \quad y'(b) = \beta_b, \quad y(b) = \nu_b, \tag{4}$$

The constants parameters in equations (2) - (4) are taken to be continuous functions and ν fulfils the condition for the existence and uniqueness of the problem. It follows that (1) is a third-order ordinary differential equations with initial, and boundary conditions (3) - (4). Modeled equation (1) is of great importance to scientists and engineers due to its numerous usage in sciences and engineering. Scholars have developed numerous techniques for solving (1). The conventional methods of solving (1) could be; by reducing it to the system of first-order ordinary differential equations and a suitable numerical methods for first-order ODEs would be applied to solve the system of equations. The shooting method, and finite different method. The limitations of these methods have been discussed by numerous scholars [1–4]. For instance, The reduction approach have been reported by various literatures to have alot of limitations such computational burden, lots of human efforts, requires lots of time for the computation, and complexity in the computer computation which affects the accuracy and efficiency of the method in terms of error and time of execution. On the other hand, the shooting method suffers inaccuracy and instability while the finite different method is very demanding and does not give a satisfactory results. Other numerical methods for solving ordinary differential equations also exist in literature [5–15].

In other to improve the limitations and the weakness associated with the conventional methods, we present a higher-order block method capable of solving (1) directly, accurately and reduces computational time. The new method namely HBM is expected to improve the accuracies of the existing methods in the literature.

2. Methodology

In this section, a new method capable of handing (1) is constructed. We considered an approximate equation as the power series of the form,

$$y(x) = \sum_{z=0}^{3k+1} m_z x^z \tag{5}$$

where the step-number ($k = 3$) is taken into consideration, $3k+1$ is equivalent to $r + 2s - 1$, where r is the interpolation points and s is the collocation points. The third and fourth derivative of (5) yields

$$\begin{cases} y'''(x) = \sum_{z=3}^{3k+1} z(z-1)(z-2)m_z x^{z-3} \\ y^{(iv)}(x) = \sum_{z=4}^{3k+1} z(z-1)(z-2)(z-3)m_z x^{z-4} \end{cases} \tag{6}$$

Now, interpolating (5) at $x_{n+r}, r = 0(1)k - 1$ and collocating both the third and fourth derivatives in (6) at $x_{n+s}, s = 0(1)k$ to generate the system of ten by ten equations written in matrix form as

$$X_1 A_1 = B_1 \tag{7}$$

$$X_1 = \begin{pmatrix} 1 & x_n & x_n^2 & x_n^3 & x_n^4 & x_n^5 & \dots & x_n^9 & x_n^{10} \\ 0 & 1 & 2x_n & 3x_n^2 & 4x_n^3 & 5x_n^4 & \dots & 9x_n^8 & 10x_n^9 \\ 0 & 0 & 2 & 6x_n & 12x_n^2 & 20x_n^3 & \dots & 72x_n^7 & 90x_n^8 \\ 0 & 0 & 0 & 6 & 24x_n & 60x_n^2 & \dots & 504x_n^6 & 720x_n^7 \\ 0 & 0 & 0 & 6 & 24x_{n+1} & 60x_{n+1}^2 & \dots & 504x_{n+1}^6 & 720x_{n+1}^7 \\ 0 & 0 & 0 & 6 & 24x_{n+2} & 60x_{n+2}^2 & \dots & 504x_{n+2}^6 & 720x_{n+2}^7 \\ 0 & 0 & 0 & 6 & 24x_{n+3} & 60x_{n+3}^2 & \dots & 504x_{n+3}^6 & 720x_{n+3}^7 \\ 0 & 0 & 0 & 0 & 24 & 120x_n & \dots & 3024x_n^5 & 5040x_n^6 \\ 0 & 0 & 0 & 0 & 24 & 120x_{n+1} & \dots & 3024x_{n+1}^5 & 5040x_{n+1}^6 \\ 0 & 0 & 0 & 0 & 24 & 120x_{n+2} & \dots & 3024x_{n+2}^5 & 5040x_{n+2}^6 \\ 0 & 0 & 0 & 0 & 24 & 120x_{n+3} & \dots & 3024x_{n+3}^5 & 5040x_{n+3}^6 \end{pmatrix}$$

$B_1 = (y_n, y_{n+1}, y_{n+2}, \nu_n, \nu_{n+1}, \nu_{n+2}, \nu_{n+3}, w_n, w_{n+1}, w_{n+2}, w_{n+3})^T$
 $A_1 = (m_0, m_1, m_2, m_3, m_4, m_5, m_6, m_7, m_8, m_9, m_{10})^T$
 Solving the system of equations above, we obtained the values of the coefficients $m_n, n = 0, \dots, 10$ as follows.

After obtaining the values of these coefficients and changing the variable, $x = xn + lh$ using the appropriate transformation, the polynomial in (5) may be written as,

$$y(l) = a_0 y_n + a_1 y_{n+1} + a_2 y_{n+2} + h^3 (b_0 \nu_n + b_1 \nu_{n+1} + b_2 \nu_{n+2} + b_3 \nu_{n+3}) + h^4 (c_0 w_n + c_1 w_{n+1} + c_2 w_{n+2} + c_3 w_{n+3}) \tag{8}$$

where

$$\left\{ \begin{aligned} a_0 &= \frac{de}{2}, a_1 = -el, a_2 = \frac{dl}{2}, d = (l - 1), e = (l - 2) \\ b_0 &= \frac{h^2}{544320} de(77l^7 - 1059l^6 + 5699l^5 - 14625l^4 + 15749l^3 + 3165l^2 - 22003l + 18381) \\ b_1 &= \frac{lh^3}{20160} de(7l^7 - 79l^6 + 304l^5 - 370l^4 - 206l^3 + 122l^2 + 778l + 2090) \\ b_2 &= -\frac{lh^3}{20160} de(7l^7 - 89l^6 + 409l^5 - 755l^4 + 319l^3 + 199l^2 - 41l - 521) \\ b_3 &= -\frac{lh^3}{544320} de(77l^7 - 789l^6 + 2864l^5 - 4230l^4 + 1574l^3 + 1086l^2 + 110l - 1842) \\ c_0 &= \frac{lh^4}{181440} de(7l^7 - 99l^6 + 559l^5 - 1581l^4 + 2245l^3 - 1191l^2 - 503l + 873) \\ c_1 &= \frac{lh^4}{20160} de(7l^7 - 89l^6 + 424l^5 - 878l^4 + 550l^3 + 382l^2 + 46l - 626) \\ c_2 &= \frac{lh^4}{20160} de(7l^7 - 79l^6 + 319l^5 - 517l^4 + 205l^3 + 137l^2 + l - 271) \\ c_3 &= \frac{lh^4}{181440} de(7l^7 - 69l^6 + 244l^5 - 354l^4 + 130l^3 + 90l^2 + 10l - 150) \end{aligned} \right. \tag{9}$$

Remark 1. The variable coefficients functions in (8) are continuous and differentiable within the interval of solution of $[a, b]$ with a step size given by the function $h = \frac{b-a}{N}$. It follows that N is the number of sub-interval of the solution. The continuous function (8) and its first $y'(x)$ and second derivatives $y''(x)$ were used to generate the main and auxiliary methods which produces a sum of nine equations jointed together to supply the entire approximations on the interval for the direct solution of third-order BVPs of the type (1). Furthermore, by evaluating (8), its first and second derivatives at $x_{n+l}, l = 0(1)k$, The following nine equations or otherwise called HBM were acquired.

$$\begin{aligned} y_{n+1} &= y_n + y'_n h + \frac{1}{2} y''_n h^2 + \frac{62387}{544320} h^3 v_n + \frac{89}{3360} h^3 v_{n+1} + \frac{439}{20160} h^3 v_{n+2} + \\ &\quad \frac{1031}{272160} h^3 v_{n+3} + \frac{1879}{181440} h^4 w_n - \frac{359}{10080} h^4 w_{n+1} - \frac{13}{960} h^4 w_{n+2} - \frac{17}{18144} h^4 w_{n+3} \\ y_{n+2} &= y_n + 2y'_n h + 2y''_n h^2 + \frac{5048}{8505} h^3 v_n + \frac{164}{315} h^3 v_{n+1} + \frac{4}{21} h^3 v_{n+2} + \frac{244}{8505} h^3 v_{n+3} \\ &\quad + \frac{172}{2835} h^4 w_n - \frac{4}{15} h^4 w_{n+1} - \frac{34}{315} h^4 w_{n+2} - \frac{4}{567} h^4 w_{n+3} \end{aligned} \tag{10}$$

$$\begin{aligned} y_{n+3} &= y_n + 3y'_n h + \frac{9}{2} y''_n h^2 + \frac{657}{448} h^3 v_n + \frac{2187}{1120} h^3 v_{n+1} + \frac{2187}{2240} h^3 v_{n+2} + \frac{117}{1120} h^3 v_{n+3} \\ &\quad + \frac{351}{2240} h^4 w_n - \frac{729}{1120} h^4 w_{n+1} - \frac{729}{2240} h^4 w_{n+2} - \frac{27}{1120} h^4 w_{n+3} \end{aligned}$$

$$\begin{aligned} y'_{n+1} &= y'_n + h y''_n + \frac{19519}{68040} h^2 v_n + \frac{1301}{10080} h^2 v_{n+1} + \frac{181}{2520} h^2 v_{n+2} + \\ &\quad \frac{3329}{272160} h^2 v_{n+3} + \frac{371}{12960} h^3 w_n - \frac{313}{2520} h^3 w_{n+1} - \frac{89}{2016} h^3 w_{n+2} - \frac{137}{45360} h^3 w_{n+3} \end{aligned}$$

$$\begin{aligned} y'_{n+2} &= y'_n + 2h y''_n + \frac{5731}{8505} h^2 v_n + \frac{296}{315} h^2 v_{n+1} + \frac{109}{315} h^2 v_{n+2} + \frac{344}{8505} h^2 v_{n+3} \\ &\quad + \frac{206}{2835} h^3 w_n - \frac{20}{63} h^3 w_{n+1} - \frac{52}{315} h^3 w_{n+2} - \frac{4}{405} h^3 w_{n+3} \end{aligned} \tag{11}$$

$$\begin{aligned}
 y'_{n+3} &= y'_n + 3h y''_n + \frac{603}{560} h^2 v_n + \frac{2187}{1120} h^2 v_{n+1} + \frac{729}{560} h^2 v_{n+2} + \frac{27}{160} h^2 v_{n+3} \\
 &\quad + \frac{27}{224} h^3 w_n - \frac{243}{560} h^3 w_{n+1} - \frac{243}{1120} h^3 w_{n+2} - \frac{9}{280} h^3 w_{n+3} \\
 y''_{n+1} &= y''_n + \frac{6893}{18144} h v_n + \frac{313}{672} h v_{n+1} + \frac{89}{672} h v_{n+2} + \frac{397}{18144} h v_{n+3} \\
 &\quad + \frac{1283}{30240} h^2 w_n - \frac{851}{3360} h^2 w_{n+1} - \frac{269}{3360} h^2 w_{n+2} - \frac{163}{30240} h^2 w_{n+3} \\
 y''_{n+2} &= y''_n + \frac{223}{567} h v_n + \frac{20}{21} h v_{n+1} + \frac{13}{21} h v_{n+2} + \frac{20}{567} h v_{n+3} \\
 &\quad + \frac{43}{945} h^2 w_n - \frac{16}{105} h^2 w_{n+1} - \frac{19}{105} h^2 w_{n+2} - \frac{8}{945} h^2 w_{n+3} \\
 y'_{n+3} &= y'_n + \frac{93}{224} h v_n + \frac{243}{224} h v_{n+1} + \frac{243}{224} h v_{n+2} + \frac{93}{224} h v_{n+3} \\
 &\quad + \frac{57}{1120} h^2 w_n - \frac{81}{1120} h^2 w_{n+1} + \frac{81}{1120} h^2 w_{n+2} - \frac{57}{1120} h^2 w_{n+3}
 \end{aligned} \tag{12}$$

3. The Properties of the HBM

In this section, It is important to examine and discuss the convergence analysis of the HBM such as the order & the error constants, convergence, zero stability, and convergence.

3.1. Order & Error Constant of the HBM

According to [16–18], the linear difference operator L in respect to equation (10) is defined by

$$L[y(x); h] = \sum_{j=0}^k \{a_j y(x_n + jh) - h^3 v_j y'''(x_n + jh) - h^4 w_j y''''(x_n + jh)\} \tag{13}$$

$y(x)$ is assumed to be continuously differentiable function. Therefore function (13) can be maximize in Taylor series about x to obtain

$$L(y(x); h) = D_0 y(x) + D_1 h y'(x) + D_2 h^2 y''(x) + \dots + D_q h^q y^{(q)}(x) \tag{14}$$

where $D_q, q = 1, 2, \dots$ are constants in such that,

$$D_0 = D_1 = \dots = D_q = 0, D_{p+3} \neq 0 \tag{15}$$

The method (10) is of uniform order 11 with the following error constants

$$D_{q+3} = (-5.143239 \times 10^{-10}, -1.312531 \times 10^{-09}, -2.394622 \times 10^{-09})^T.$$

3.2. Consistency

As stated by [18–20], a LMM of the form (10) is said to be consistent if it has order greater than or equals to one. The HBM satisfies the condition for consistency since its order, is 11 which is greater than one.

3.3. Zero-stability of the HBM

Taking into consideration method (10) could be written in matrix difference form as ,

$$\begin{aligned}
 A^{(0)} Y_m &= A^{(1)} Y_{m-1} + h^3 [C^{(0)} G_m + C^{(3)} G_{m-3}] + \\
 &\quad h^4 [D^{(0)} H_m + D^{(4)} H_{m-3}]
 \end{aligned} \tag{16}$$

The matrix parameter $A^{(0)}, A^{(1)}, C^{(0)}, C^{(3)}, D^{(0)}, D^{(4)}, H^{(0)}, H^{(1)}$ are the square matrices whose arrays are the coefficients (10) and are defined as below.

$$A^{(0)} = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix}, A^{(1)} = \begin{pmatrix} 0 & 0 & 1 \\ 0 & 0 & 1 \\ 0 & 0 & 1 \end{pmatrix},$$

$$C^{(0)} = \begin{pmatrix} \frac{89}{3360} & \frac{439}{20160} & \frac{1031}{272160} \\ \frac{164}{315} & \frac{4}{21} & \frac{244}{8505} \\ \frac{2187}{1120} & \frac{2187}{2240} & \frac{117}{1120} \end{pmatrix}$$

$$C^{(3)} = \begin{pmatrix} 0 & 0 & \frac{62387}{544320} \\ 0 & 0 & \frac{5048}{8505} \\ 0 & 0 & \frac{657}{448} \end{pmatrix},$$

$$D^{(0)} = \begin{pmatrix} -\frac{359}{10080} & -\frac{13}{960} & -\frac{17}{18144} \\ -\frac{4}{15} & -\frac{34}{315} & -\frac{4}{567} \\ -\frac{729}{1120} & -\frac{729}{2240} & -\frac{27}{1120} \end{pmatrix}$$

$$D^{(4)} = \begin{pmatrix} 0 & 0 & \frac{1879}{181440} \\ 0 & 0 & \frac{172}{2835} \\ 0 & 0 & \frac{351}{2240} \end{pmatrix}$$

The limit of (16) is taken as $h \rightarrow 0$, to obtain the difference system

$$A^{(0)}Y_m - A^{(1)}Y_{m-1} = 0 \tag{17}$$

The first characteristics of (17) is given by

$$\rho(F) = \det(F A^{(0)} - A^{(1)}) = F^2(F - 1) = 0 \tag{18}$$

Hence, $F = 0, 0, 1$

The block method of the form (10) is said to be zero stable if as $\rho(F) = 0$, then $|F_j| \leq 1, j = 0, 1, \dots$ for those roots with $|F_j| = 1$, the multiplicity does not exceed 1 [21–26]. Also the block method (10) is consistent since $p > 1$. Since (10) is consistent and zero stable, it is also convergence [27].

3.4. Convergence

In respect to the claim of Lambert [18] which also corroborates with proof of Adogbe & Omole, and Adogbe *et al.* [28, 29] that any numerical method belonging to a class of LMM must satisfies the fundamental and adequate conditions. It follows that for such class of method to be convergent it must be consistent and zero-stable. consequently, the HBM satisfies the conditions for consistency and zero-stability, So it is convergent.

4. Implementation Tactics

In this part, we present the comprehensive procedure for the implementation of the new proposed method tagged Higher-order Block Method (HBM). The HBM is implemented in block method together with the aid of Newton-Raphson approach via a Mathematica 11.0 code which uses f-solve for linear and find-root for non-linear to simultaneously generate the solution at

the initial point to the terminal point while adjusting for boundary conditions.

Meanwhile, each block integrators in (10), (11) and (12) forms a system of equations which is applied along with the Newton’s method. The starting values in the application of the Newton’s Raphson method which are considered as the approximations provided by the Taylor series expansion formulas

$$\begin{aligned} y_{n+i} &= y_n + ih y'_n + \left(\frac{(ih)^2}{2}\right) y''_n + \left(\frac{(ih)^3}{6}\right) v_n + \left(\frac{(ih)^4}{24}\right) w_n, \\ & \quad i = 0(1) \dots, k \\ y'_{n+i} &= y'_n + ih y''_n + \left(\frac{(ih)^2}{2}\right) v_n + \left(\frac{(ih)^3}{6}\right) w_n, \\ & \quad i = 0(1) \dots, k \\ y''_{n+i} &= y''_n + ih v_n + \left(\frac{(ih)^2}{2}\right) w_n, \\ & \quad i = 0(1) \dots, k. \end{aligned} \tag{19}$$

The $w_{n+i}, i = 0(1) \dots, k$ appearing in (19) connotes the fourth derivative at $x_{n+i}, i = 0(1) \dots, k$. In other to get a closed form solution of (20) which is expanded in (19), it is important to calculate the values of $w_{n+i}, i = 0(1) \dots, k$. For more clarification,

$$y^{(iv)}(x) = \left(\frac{dv(x, y, y', y'', y''')}{dx}\right), i = 0(1) \dots, k. \tag{20}$$

$$y^{(iv)}(x) = \frac{dv}{dx} + \frac{dv}{dy} y' + \frac{dv}{dy'} y'' + \frac{dv}{dy''} y''' + v \frac{dv}{dy'''} v, i = 0(1) \dots, k. \tag{21}$$

Consequently, the solution of (1) is simultaneously generate on the entire interval of integration by using the main method (10) for $n = 0, 1, \dots, N_2$ to obtain $3N - 2$ equations and the additional method (11) and (12) which are employed to complete the set of equations needed to simultaneously solve $3N$ by $3N$ system of equations for solving (1) directly.

5. The Numerical Experiments

It is very important to test the accuracy and usefulness of the HBM by applying the HBM to solve modeled problems. Three standard third-order BVPs varying from linear to non-linear was computed and the results were presented and discussed extensively. All computations and programming were carried out using Maple 18.0 and Mathematica 11.0.

5.1. Test problem 1

First test problem, third-order linear boundary value problem solved by Ahmed [30].

$$y''' - xy + (x^2 - 2x^2 - 5x - 3)e^x, y(0) = 0, y'(0) = 1, y'(1) = -e(22)$$

with theoretical solution as

$$y(x) = x(1 - x)e^x \tag{23}$$

Table 1. Numerical results of HBM, AE in HBM and AE in [30] for Problem 1 using $N = 10$ or $h = 0.1$

x	y-Exact solution	y-Computed solution	AE in HBM	AE in [30]
0.1	0.09946538262680829	0.09946538262680911	8.18789×10^{-16}	1.36200×10^{-10}
0.2	0.19542444130562720	0.19542444130563258	5.38458×10^{-15}	1.90000×10^{-12}
0.3	0.28347034959096070	0.28347034959097905	1.83742×10^{-14}	1.10000×10^{-12}
0.4	0.35803792743390490	0.35803792743392630	2.14273×10^{-14}	7.00000×10^{-12}
0.5	0.41218031767503205	0.41218031767503670	4.66294×10^{-15}	1.00000×10^{-11}
0.6	0.43730851209372210	0.43730851209368804	3.40838×10^{-14}	1.70000×10^{-12}
0.7	0.42288806856880007	0.42288806856871670	8.33777×10^{-14}	8.80000×10^{-11}
0.8	0.35608654855879485	0.35608654855866470	1.30174×10^{-13}	9.42000×10^{-11}
0.9	0.22136428000412547	0.22136428000395672	1.68754×10^{-13}	1.36800×10^{-10}
1.0	0.00000000000000000	1.83070×10^{-13}	1.83070×10^{-13}	0.00000×10^{-00}

Table 2. Comparison of Maximum absolute error in HBM with other existing methods for Problem 1

References	Maximum Absolute Error
Current method-HBM	1.8307×10^{-13}
[30]	1.3700×10^{-10}
[31]	5.3000×10^{-07}
[32]	1.8400×10^{-06}
[33]	2.3700×10^{-07}
[34]	8.1200×10^{-04}
[35]	1.6400×10^{-02}
[36]	2.6400×10^{-07}
[37]	8.2900×10^{-09}

Table 3. Numerical results of HBM and Absolute error for Problem 2 taking $N = 100$ or $h = 0.01$

x	y-Exact solution	y-Computed solution	AE in HBM
0.01	-0.009998833350833248	-0.009998833350833078	1.70003×10^{-16}
0.02	-0.019990667226655746	-0.019990667226655066	6.80012×10^{-16}
0.03	-0.029968504252313413	-0.029968504252311883	1.53003×10^{-15}
0.04	-0.039925351251935550	-0.039925351251932820	2.72699×10^{-15}
0.05	-0.049854221347501636	-0.049854221347497375	4.26048×10^{-15}
0.06	-0.059748136056118590	-0.059748136056112450	6.14092×10^{-15}
0.07	-0.069600127385578860	-0.069600127385570460	8.39606×10^{-15}
0.08	-0.079403239927770000	-0.079403239927759020	1.09773×10^{-14}
0.09	-0.089150532949507160	-0.089150532949493310	1.38500×10^{-14}
0.10	-0.098835082480359870	-0.098835082480342770	1.70974×10^{-14}

Table 4. Numerical results of HBM and Absolute error for Problem 2 taking $N = 10$ or $h = 0.1$

x	y-Exact solution	y-Computed solution	AE in HBM
0.1	-0.098835082480359870	-0.09883508248034277	1.70974×10^{-14}
0.2	-0.190722557563258760	-0.19072255756318998	6.87783×10^{-14}
0.3	-0.268923388061819000	-0.26892338806166494	1.54043×10^{-13}
0.4	-0.327111407539266430	-0.32711140753900390	2.62512×10^{-13}
0.5	-0.359569153953152255	-0.35956915395277234	3.79918×10^{-13}
0.6	-0.361371182972822670	-0.36137118297233617	4.86500×10^{-13}
0.7	-0.328551020491222400	-0.32855102049065060	5.71820×10^{-13}
0.8	-0.258248192723828200	-0.25824819272318880	6.39433×10^{-13}
0.9	-0.148832112829221850	-0.14883211282853925	6.82593×10^{-13}
1.0	0.0000000000000000000	6.98759×10^{-13}	6.98759×10^{-13}

In Table 1, The theoretical solution, approximate solution, absolute error in HBM and the absolute error in other existing

method were presented. On the other hand, Table 2 shows the comparison of Maximum absolute error in HBM against nu-

Table 5. Comparison of Maximum absolute error in HBM with other existing methods for Problem 2

References	Maximum Absolute Error
Current method-HBM	6.98759×10^{-13}
[34]	8.55940×10^{-05}
[35]	8.88390×10^{-03}
[36]	2.15720×10^{-08}

Table 6. Numerical results of HBM and Absolute error Problem 3 with using ($N = 10$) or ($h = 0.1$)

x	y-Exact solution	y-Computed solution	AE in HBM
0.1	0.09531017980432493	0.09531017980433536	1.04222×10^{-14}
0.2	0.18232155679395460	0.18232155679398550	3.09197×10^{-14}
0.3	0.26236426446749106	0.26236426446754463	5.35683×10^{-14}
0.4	0.33647223662121290	0.33647223662128860	7.57172×10^{-14}
0.5	0.40546510810816440	0.40546510810826103	9.66449×10^{-14}
0.6	0.47000362924573563	0.47000362924585110	1.15463×10^{-13}
0.7	0.53062825106217040	0.53062825106230150	1.31117×10^{-13}
0.8	0.58778666490211910	0.58778666490226180	1.42775×10^{-13}
0.9	0.64185388617239470	0.64185388617254560	1.50879×10^{-13}
1.0	0.69314718055994530	0.69314718056009890	1.53655×10^{-13}

Table 7. Comparison of the numerical errors in HBM and other existing methods for Problem 3 with $N = 10$

x	AE in HBM	AE in [37]	AE in [38]
0.1	1.04222×10^{-14}	2.22000×10^{-06}	2.947641×10^{-10}
0.2	3.09197×10^{-14}	4.67000×10^{-06}	2.084566×10^{-11}
0.3	5.35683×10^{-14}	1.890000×10^{-06}	4.147355×10^{-11}
0.4	7.57172×10^{-14}	3.560000×10^{-06}	2.208859×10^{-12}
0.5	9.66449×10^{-14}	7.430000×10^{-07}	2.777215×10^{-11}
0.6	1.15463×10^{-13}	1.220000×10^{-06}	2.647594×10^{-11}
0.7	1.31117×10^{-13}	2.780000×10^{-06}	1.190750×10^{-11}
0.8	1.42775×10^{-13}	3.74000×10^{-06}	1.816331×10^{-12}
0.9	1.50879×10^{-13}	4.11000×10^{-06}	7.666364×10^{-10}
1.0	1.53655×10^{-13}	0.00000×10^{-00}	0.00000×10^{-00}

merous methods proposed by various authors in the literatures. It is very clear that the efficiency and accuracy of HBM is established comprehensively.

5.2. Test problem 2

Consider the third-order boundary value problem solved by Abdullah et al. [34].

$$y''' - y + (7 - x^2)\cos x + (x^2 - 6x - 1)\sin x, \\ y(0) = 0, y'(0) = -1, y'(1) = 2\sin 1 \quad (24)$$

with the analytical solution given as

$$y(x) = (x^2 - 1)\sin(x) \quad (25)$$

Here, the interpretation of Tables 3, 4 and 5 are made. The computational results of problem 2 using the proposed method named HBM with $h = 0.01$ is shown, while in Table 2, we presents the computational results of problem 2 using HBM with $h = 0.1$. It could be observed that as the value of h

decreases, the accuracies also increases whereas as the h increases, the accuracies of the method decreases as demonstrated in Tables 3 and 4. furthermore, we computed the maximum absolute error of the HBM for problem 2 and compared with other numerical methods in the cited literature. This is illustrated in the Table 5. The HBM gives a minimal error when compared with other existing method.

5.3. Test problem 3

Lastly, a non-linear third-order problem studied by Akram et al. [37] and, Hossain et al. [38] is taking into consideration.

$$y''' + 2e^{3y} = -4(1 + x)^{-3}, \\ y(0) = 0, y'(0) = 1, y'(1) = \ln(2) \quad (26)$$

with the exact solution.

$$y(x) = \ln(1 + x) \quad (27)$$

Finally, we considered a non-linear third-order bvp in other to determine the strength and advantage of the HBM. In Table 6,

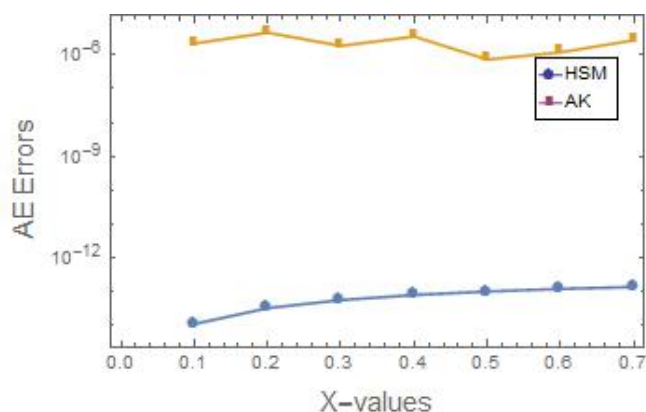


Figure 1. Comparison of Absolute error in HBM with Absolute error in Akram et al. [37]

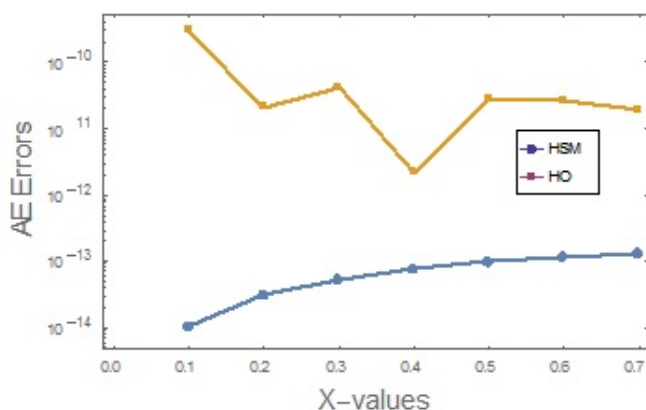


Figure 2. Comparison of Absolute error in HBM with Absolute error in Hossain et al. [38]

The computational results and absolute error on HBM is presented while Table 7 presented the comparison of absolute error of the non-linear problem using HBM and compared with other similar methods in the cited work. In addition, the comparison of errors in curves for the non-linear problem were also presented in Figure 1 and 2. without any iota of doubt, we have been able to demonstrate the convergence, efficiency and accuracy of the new method namely HBM over other techniques.

6. Conclusion

This study has successfully presented a construction of new numerical method (HBM), analyse and implemented for solving numerous type of third-order BVPs directly without utilizing the conventional method such as shooting method, reduction to first-order system of equations, finite difference method. In the derivation, the method make use of power series basic function due to its great stability and convergence attributes. The multi-collocation points was introduced for the purpose of improving the order of the work, which also enhances good accuracy, the points of interpolation and collocation were also chosen strategically in order to obtain a desired results. The method was applied to solve linear and non-linear boundary

value problems in other to test its efficiency and accuracy. The results was also compared with numerous methods in the literatures as shown in Tables 1, 3, 4 and 6. The results shows that the HBM is more efficient and accurate than other methods in the literature. The method is of order 11 with a smaller error terms. The discussion of HBM were discussed in details in chapter three. both the absolute error and maximum absolute error were also tested in other to ascertain the uniqueness and reliability of the HBM. Hence we conclude that HBM is a best candidate in solving a class of such problems.

Acknowledgements

The authors are much grateful to the reviewer for their recommendations and constructive comments.

References

- [1] S. N. Jator, "Multiple finite difference methods for solving third order ordinary differential equations", *International Journal of Pure and Applied Mathematics* **43** (2007) 253.
- [2] S. N. Jator, "Novel finite difference schemes for third order boundary value problems", *Intern. J. Pure and Appl. Math.* **53** (2009) 37.
- [3] D. O. Awoyemi, "A P-stable linear multistep method for solving general third order ordinary differential equations", *Intern. J. Comput. Math.* **80** (2003) 987.
- [4] E. O. Omole & B. G. Ogunware, "3- Point single hybrid block method (3PSHBM) for direct solution of general second order initial value problem of ordinary differential equations", *Journal of Scientific Research and Reports* **20** (2018) 1.
- [5] V. O. Ataboa & S. O. Adee, "A new special 15-step block method for solving general fourth order ordinary differential equations", *J. Nig. Soc. Phys. Sci.* **3** (2021) 308, <https://doi.org/10.46481/jnsps.2021.337>.
- [6] A. O. Adeniran, S. A. Odejide, B. S. & Ogundare, "One step hybrid numerical scheme for the direct solution of general second order ordinary differential equations", *International Journal of Applied Mathematics* **28** (2015) 197, <http://dx.doi.org/10.12732/ijam.v28i3.2>
- [7] K. E. Atkinson, *An introduction to numerical analysis*, 2nd edition John Wiley and Sons, New York (1989).
- [8] Familua A. B., "Direct approach for solving second order delay differential equations through a five-step with several off-grid points", *International Journal of Applied Mathematics and Theoretical Physics* **8** (2022) 1, <https://doi.org/10.11648/j.ijamtp.20220801.11>
- [9] A. Shokri & M. Tahmourasi, "A new two-step Obrechhoff method with vanished phase-lag and some of its derivatives for the numerical solution of radial Schrodinger equation and related IVPs with oscillating solutions", *Iranian Journal of Mathematical Chemistry* **8** (2017) 137.
- [10] V. J. Shaalinia & S. E. Fadugba, "A new multi-step method for solving delay differential equations using Lagrange interpolation", *J. Nig. Soc. Phys. Sci.* **3** (2021) 159, <https://doi.org/10.46481/jnsps.2021.247>.
- [11] A. Shokri, "An explicit trigonometrically fitted ten-step method with phase-lag of order infinity for the numerical solution of the radial Schrodinger equation", *Applied and Computational Mathematics* **14** (2015) 63.
- [12] Y. Skwame, J. Sabo & M. Mathew, "The treatment of second order ordinary differential equations using equidistant one-step block hybrid", *Asian Journal of Probability & Statistics* **5** (2019) 1.
- [13] A. Shokri, J. Vigo-Aguiar, K. M. Khalsaraei & R. Garcia-Rubio, "A new implicit six-step P-stable method for the numerical solution of Schrödinger equation", *International Journal of Computer Mathematics* **97** (2020) 802.
- [14] M. Kida, S. Adamu, O. O. Aduroja & T. P. Pantuvo, "Numerical solution of stiff and oscillatory problems using third derivative trigonometrically fitted block method", *J. Nig. Soc. Phys. Sci.* **4** (2022) 34, <https://doi.org/10.46481/jnsps.2022.271>.

- [15] J. O. Kuboye, O. R. Elusakin & O. F. Quadri, "Numerical algorithms for direct solution of fourth order ordinary differential equations", *J. Nig. Soc. Phys. Sci.* **2**, (2020) 218, <https://doi.org/10.46481/jnsps.2020.100>.
- [16] B. G. Ogunware, E. O. Omole & O. O. Olanegan, "Hybrid and non-hybrid implicit schemes for solving third order ODEs using block method as predictors", *Journal of Mathematical Theory & Modelling (iiste)* **5** (2015) 10.
- [17] B. G. Ogunware & E. O. Omole, "A class of irrational linear block method for the direct numerical solution of third order ordinary differential equations", *Turkish Journal of Analysis and Number Theory* **8** (2020) 21, <https://doi.org/10.12691/tjant-8-2-1>.
- [18] J. D. Lambert, *Computational methods in ordinary differential equations*, John Wiley & Sons Inc. (1973).
- [19] A. A. Aigbiremhon & E. O. Omole, "A Four-step Collocation Procedure by means of perturbation term with application to third-order ordinary differential equations", *International Journal of Computer Applications* **174** (2020) 25.
- [20] B. I. Akinnukawe & K. O. Muka, "L-Stable block hybrid numerical algorithm for first-order ordinary differential equations", *J. Nig. Soc. Phys. Sci.* **2** (2020) 160.
- [21] E. O. Omole, O. A. Jeremiah & L. O. Adoghe, "A class of continuous implicit seventh-eighth method for solving $y' = f(x, y)$ using power series as basic function", *International Journal of Chemistry, Mathematics and Physics (IJCMP)* **4** (2020) 39, <https://dx.doi.org/10.22161/ijcmp.4.3.2>.
- [22] A. Shokri, J. Vigo-Aguiar, M. M. Khalsaraei & R. Garcia-Rubio, "A new four-step P-stable Obrechhoff method with vanished phase-lag and some of its derivatives for the numerical solution of radial Schrödinger equation", *Journal of Computational and Applied Mathematics* **354** (2019) 569.
- [23] A. Shokri & A. A. Shokri, "Implicit one-step L-stable generalized hybrid methods for the numerical solution of first order initial value problems", *Iranian Journal of Mathematical Chemistry* **4** (2013) 201.
- [24] B. G. Ogunware, L. O. Adoghe, D. O. Awoyemi, O. O. Olanegan & E. O. Omole, "Numerical treatment of general third order ordinary differential equations using Taylor series as predictor", *Physical Science International Journal* **17** (2018) 1, <https://doi.org/10.9734/PSIJ/2018/22219>.
- [25] O. A. Akinfenwa, S. A. Okunuga, B. I. Akinnukawe, U. P. Rufai & R. I. Abdulganiy, "Multi-derivative hybrid implicit Runge-Kutta method for solving stiff system of a first order differential equation", *Far East Journal of Mathematical Sciences (FJMS)* **106** (2018) 543.
- [26] R. Abdelrahim, "Numerical solution of third order boundary value problems using one-step hybrid block method", *Ain Shams Engineering Journal* **10** (2019) 179.
- [27] D. Faires & R. L. Burden, *Numerical methods*, 2nd ed. International Thomson Publishing Inc. (1998).
- [28] L. O. Adoghe & E. O. Omole, "A fifth-fourth continuous block implicit hybrid method for the solution of third order initial value problems in ordinary differential equations", *Journal of Applied and Computational Mathematics* **8** (2019) 50, <https://doi.org/10.11648/j.acm.20190803.11>.
- [29] L. O. Adoghe, B. G. Ogunware & E. O. Omole, "A family of symmetric implicit higher order methods for the solution of third order initial value problems in ordinary differential equations", *Journal of Theoretical Mathematics & Applications* **6** (2016) 67.
- [30] J. Ahmed, "Numerical solutions of third-order boundary value problems associated with draining and coating flows", *Kyungpook Mathematical Journal* **57** (2017) 651, <https://doi.org/10.5666/KMJ.2017.57.4.651>.
- [31] F. A. A. El-Salam, A. A. El-Sabbagh & Z. A. Zaki, "The numerical solution of linear third-order boundary value problems using nonpolynomial spline technique", *J. American. Sci.* **6** (2010) 303.
- [32] A. Khan & T. Aziz, "The numerical solution of third-order boundary value problems using quintic splines", *Appl. Math. Comput.* **137** (2003) 253.
- [33] L. Zhiyuan, Y. Wang & F. Tan, "The solution of a class of third-order boundary value problems by the reproducing kernel method", *Abs. Appl. Anal.* **1** (2012) 1.
- [34] A. S. Abdullah, Z. A. Majid & N. Senu, "Solving third order boundary value problem with fifth order block method", *Math. Meth. Eng. Econ.* **1** (2014) 87.
- [35] T. S. El-Danaf, "Quartic nonpolynomial spline solutions for third order two-point boundary value problem", *World Acad. Sci. Eng. Technology* **45** (2008) 453.
- [36] P. K. Srivastava & M. Kumar, "Numerical algorithm based on quintic non-polynomial spline for solving third-order boundary value problems associated with draining and coating flows", *Chin. Ann. Math.* **33B** (2012) 831.
- [37] G. Akram, M. Tehseen, S. S. Siddiqi & H. Rehman, "Solution of a linear third-order multi-point boundary value problem using RKM", *British J. Mat. Comput. Sci.* **3** (2013) 180.
- [38] M. B. Hossain, M. J. Hossain, S. M. Galib & M. M. H. Sikdar, "The numerical solution of third order boundary value problems using piecewise Bernstein polynomials by the Galerkin weighted residual method", *International Journal of Advanced Research in Computer Science* **7** (2016).